



# SN-NVR3508E1-P8

8CH 1U 1HDD 8CH PoE NVR



## Key Features



- Up to 8ch IP cameras access
- Up to 8MP resolution recording
- 1 SATA hard disk, up to 8TB for each HDD
- 1 RJ45 10M/100M network interface
- 8ch POE ports
- Smart search & playback
- Support cloud upgrade

# Specification

Video Input	
IP Camera Input	8 Channel
Incoming Bandwidth	56 Mbps
Outgoing Bandwidth	80 Mbps
Video Output	
HDMI Output	3840×2160, 1920×1080, 1440×900, 1280×1024
VGA Output	1920×1080, 1440×900, 1280×1024
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1@30fps
Dual Stream	Support
Multi-screen Display	1/4/9
Recoding	
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	
Sync Playback	9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Alarm	
General Alarm	Motion Detection, Video Loss, IVS, Alarm in, Alarm out
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Network	
Network Function	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK

Storage	
HDD	1 SATA Ports, up to 8TB for each HDD
Interface	
Interface	1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port
PoE	8 Ports (IEEE 802.3af), 48W
HDMI	1
VGA	1
Audio I/O	1/1
Alarm I/O	8/1
USB	3 ports (USB 2.0 × 3)
General	
Power Supply	DC48V/1.25A
Power Consumption	< 5 W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	255 × 237 × 47.5 mm (10.04 × 9.33 × 1.87 inch)
Net Weight	1 kg (2.2 lb) without HDD

## Dimensions (mm)

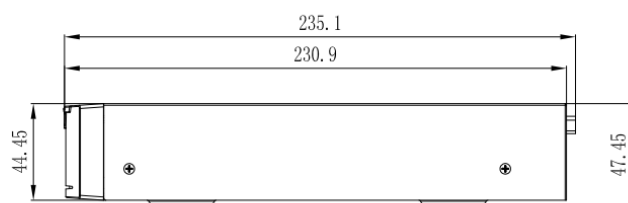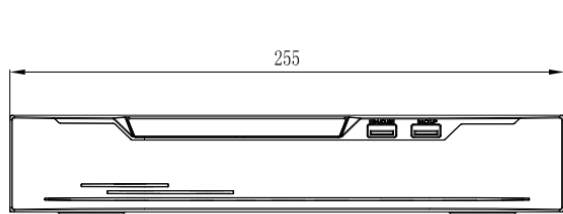

## Rear Panel

