



SN-XVR3804E1

5MP 4CH 1HDD Hybrid DVR





Key Features

- Supports AHD, TVI, CVI, CVBS, IP video inputs
- Up to 8MP resolution for recording
- Max 6-ch IP camera inputs, each channel up to 4MP
- Support HDMI and VGA output
- Smart search and playback
- Supports multiple languages
- Easy to use same Interface of GUI/WEB

Specification

Video and Audio	
Analog Video Input	4-ch BNC
AHD Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
TVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
CVI Input	8MP, 5MP, 4MP, 3MP, 1080P, 720P
CVBS Input	PAL/NTSC
IP Video Input	4+2ch, each channel up to 4MP
Audio In/Out	4/1
Two-way Talk	N/A
HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
VGA Output	1920×1080, 1280×1024, 1024×768
CVBS Output	N/A
Synchronous Playback	4/1
Recording	
Encoding Resolution	8MP, 5MP, 4MP, 1080P, 720P, 960H, D1, CIF
Frame Rate	4K@7fps, 5MP@12fps, 4MP@15fps, 1080P@30fps, 720P@30fps
Video Bit Rate	Main stream: 16Kbps~4096Kbps, Sub stream: 16Kbps~1024Kbps
Dual Stream	Support
Network	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
Protocols	HTTP, HTTPS, TCP/IP, IPv4, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP
Remote Users	4
Hard Disk	
SATA	1 SATA interfaces
Capacity	Up to 8TB capacity for each disk
Interface	
Alarm In/Out	4/1
USB Interface	Front panel: 1 × USB 2.0; Rear panel: 2 × USB 2.0
General	
Power Supply	DC12V/3A
Power Consumption	Max 15W (without HDD)
Working Temperature	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Working Humidity	Less than 90% RH
Dimensions (W×D×H)	255 x 244 x 44 mm (10.04 × 9.61 × 1.73 inch)
Net Weight	0.9 kg (1.98 lb)

Dimensions (mm)

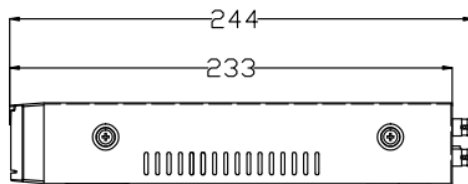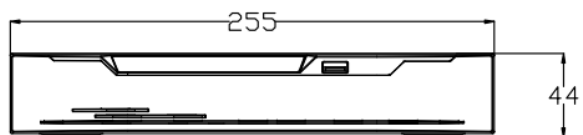

Rear Panel